


SPECIFICATION

Nominal Voltage	12V (6 cells in series)	
Rated Capacity	4.0Ah	(C ₂₀ , 1.75V/cell)
Dimensions(mm)	Length	90±1.5 mm
	Width	70±1.5 mm
	Height	100±2 mm
	Total Height	106±2 mm
Nominal Capacity @25°C (Ah)	20 Hour rate (0.202A to 10.5 volts)	4.04Ah
	10 Hour rate (0.386A to 10.5 volts)	3.86Ah
	5 Hour rate (0.690A to 10.5 volts)	3.45Ah
	1 Hour rate (2.600A to 9.6 volts)	2.60Ah
	15 min rate (7.700A to 9.6 volts)	1.92Ah
Approx. Weight	1.23 kg	
Terminal	T1/T2	
Max.Discharge Current	60A @25°C (5s)	
Internal Resistance	46mΩ @25°C (Full Charged Battery)	
Floating Design Life	5 years @25°C	
Ambient Temperature	Charge: -15°C~50°C	
	Discharge: -20°C~60°C	
	Storage: -20°C~50°C	
Container Material	A.B.S, UL94-HB, UL94-V0, Optional	
Self Discharge	VRLA batteries can be stored for more than 6 months at 25°C. Self-Discharge ratio less than 3% per month at 25°C. Please charge batteries before using.	



COMPANY CERTIFICATION

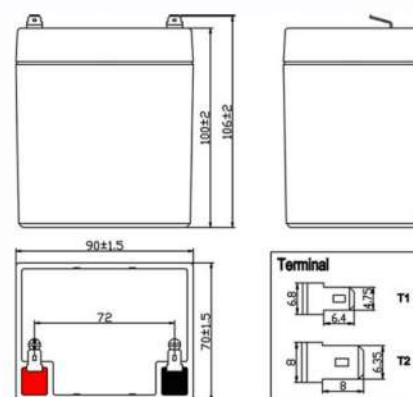


CONSTANT CURRENT DISCHARGE CHARACTERISTICS (A), (25°C)

F.V/Time	5min	10min	15min	30min	60min	2H	3H	5H	8H	10H	20H
1.60V/cell	15.78	10.34	7.700	4.100	2.600	1.465	1.046	0.706	0.467	0.400	0.214
1.70V/cell	14.32	9.580	7.260	3.980	2.542	1.442	1.020	0.695	0.460	0.390	0.206
1.75V/cell	12.86	8.980	6.860	3.860	2.510	1.430	1.010	0.690	0.456	0.386	0.202
1.80V/cell	11.54	8.400	6.460	3.740	2.474	1.418	0.998	0.682	0.450	0.380	0.194


CONSTANT WATTAGE DISCHARGE CHARACTERISTICS (WATT), (25°C)

F.V/Time	5min	10min	15min	30min	60min	2H	3H	5H	8H	10H	20H
1.60V/cell	28.54	18.87	14.18	7.824	5.157	2.905	2.085	1.408	0.932	0.799	0.428
1.70V/cell	26.37	17.80	13.61	7.662	5.063	2.872	2.037	1.388	0.918	0.780	0.413
1.75V/cell	24.01	16.99	12.98	7.495	5.003	2.850	2.018	1.379	0.911	0.773	0.406
1.80V/cell	21.73	16.03	12.33	7.324	4.936	2.829	1.996	1.364	0.900	0.761	0.390


Charge Characteristics Curve

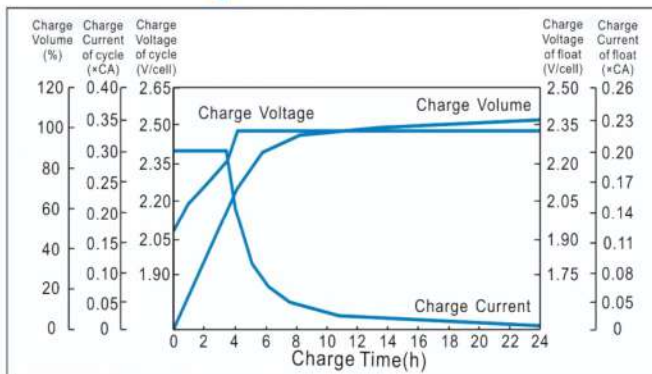


Discharge Characteristics Curve

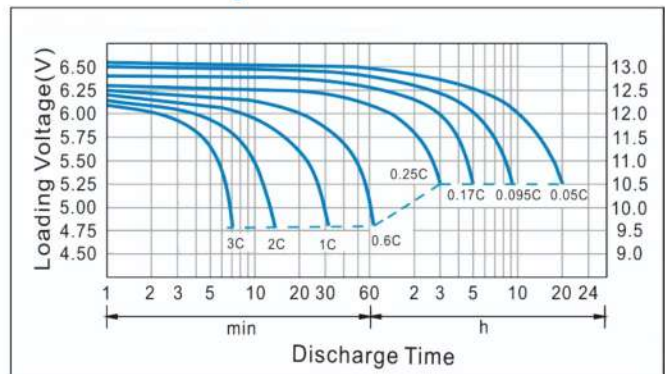

Cycle service life in relation to depth of discharge

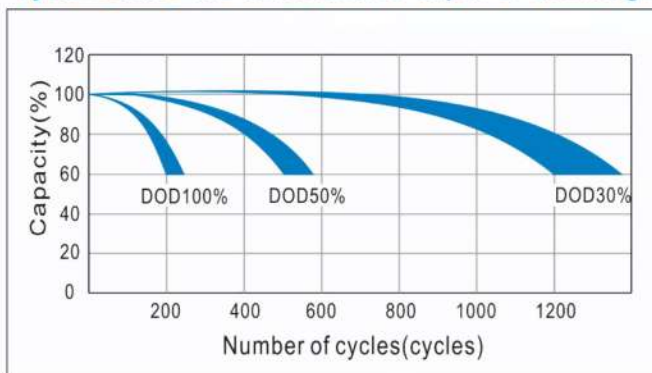

Capacity Storage Characteristics

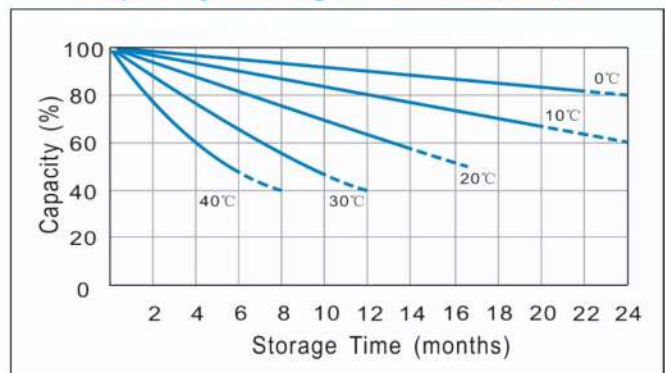

CAPACITY FACTORS WITH DIFFERENT TEMPERATURE

Battery type		-20℃	-10℃	0℃	5℃	10℃	20℃	25℃	30℃	40℃	45℃
GEL Battery	6V & 12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V & 12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

MAINTENANCE & CAUTIONS

☑ Charging Procedure:

Application	Charging method	Charge voltage at 25℃	Temperature compensation coefficient of charging voltage	Max.charging current	Temperature
For standby power source	Constant voltage charging (With current restriction)	2.25~2.30 V/cell	-3mV/℃/cell	0.2CA	-15~50℃
For cycle service		2.45~2.50 V/cell	-4mV/℃/cell	0.3CA	

- ☑ Every month, recommend inspection every battery voltage.
- ☑ Every three months, recommend equalization charge for one time. **Equalization charge method:**
 Step 1: Discharge: 100% rate capacity discharge.
 Step 2: Charge: Max. Current 0.3CA, constant voltage 2.45-2.50V/Cell charge 24h.
- ☑ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, Ambient temperature and charging voltage.
- ☑ Charge the batteries at least once every six months, if they are stored at 25℃. **Charging Method:**
 Constant Voltage: -0.2C×2h+2.45-2.50V/cell×24h, Max. Current 0.25CA
 Constant Current: -0.2C×2h+0.1C×12h
 Fast: -0.2C×2h+0.3C×4h

☑ Terminal of torque:

Bolt	M5	M6	M8
Terminal	T3, T10	T4, T7, T11, T12, T13	T5, T6, T8, T9, T14
Torque	6~7N.m	8~10N.m	10~12N.m

Note: The manufacturer reserves the right to change and modify the design and specifications without prior notice